

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 13 TOWNSHIP 15 RANGE 2

DATE: 3-18-02 8-23-07

PARTY CHIEF: -Kiste Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 9-14-97

IN. S.P.C. E ZONE NAD '83

NAME: 15021304

N: 499129.0730(m)

E: 48301.8770(m)

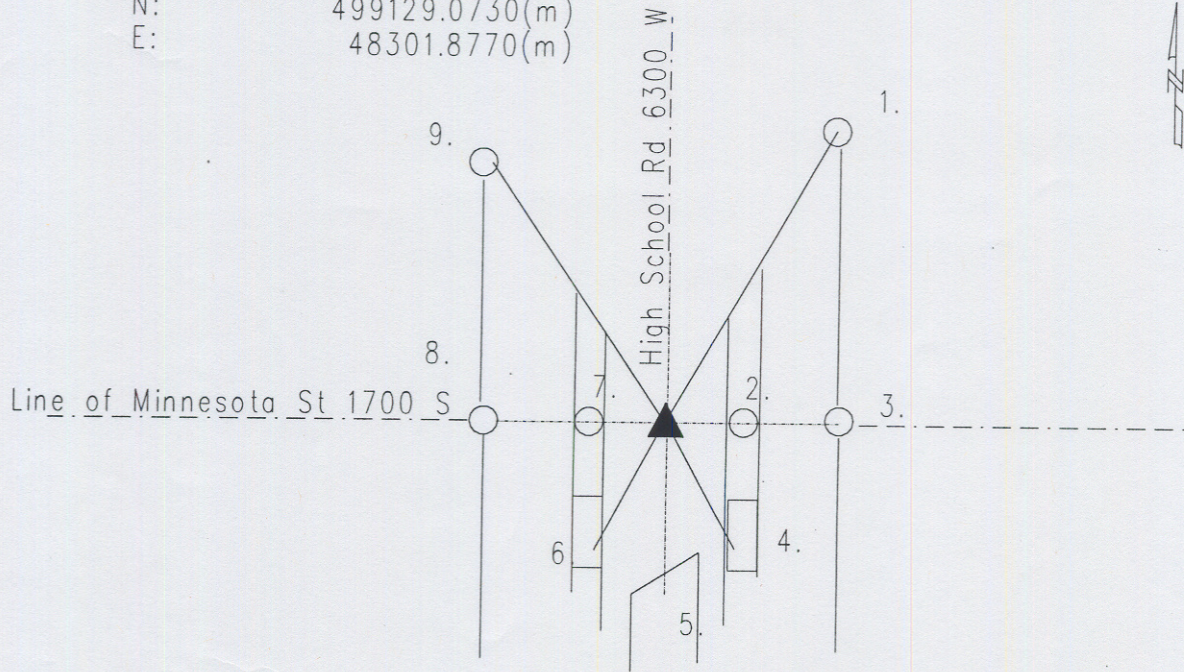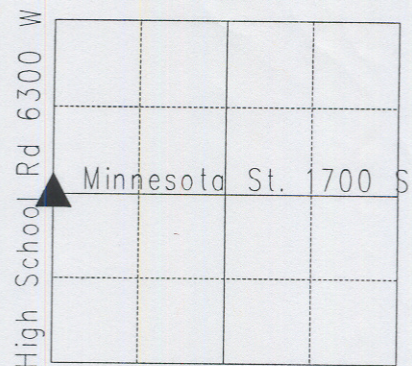

Original post set 1820 by Laughlin with witnesses: 10" beech N 10 W 30 links; 14" dogwood S 40 E 3 links per Marion County Atlas pg. 2. Hosbrook 5-6-1851 called no stone but witness: 8" ash N 63 3/4 E 44 links, 12' hickory N 22 3/4 E 66 links per Wayne Township Legal Survey Book pg.29. Monroe 6-14-51 called pipe in concrete. Burres 8-23-63 called 2" pipe. McLand 3-11-75 called 1" iron pipe. Greene 11-14-86 called same. Kiste 10-25-95 called same. Excavated by Kiste 9-11-97. Harrison set. Re-tied 3-18-02 by Kiste. 15021304

REF.	DISTANCE	DESCRIPTION
1.	50.71'	Cut 'x' top I-beam (last one)
2.	18.01'	Due E to mag nail in curb joint
3.	23.64'	Due E to cut 'x' in top (1) I-beam (past bridge)
4.	40.52'	Cut 'x' <i>NW</i> inlet
5.	52.6'	Due S to expansion joint
6.	39.56'	Cut 'x' <i>NW</i> inlet <i>top</i>
7.	18.41'	Due W to mag nail in curb joint
8.	23.90'	Due W to cut 'x' in top (3) I-beam
9.	38.28'	Cut 'x' in bolt of guard rail